


MASTRO 50EVO - 200 Amp - 230V 50/60Hz (with accessories & carry case)



Features

MMA WELDING in direct current DC

- It allows to weld with many types of electrodes and materials: cellulosic, rutile, basic, stainless steel, cast iron etc.
- HOT START.**Built-in "hot start" for easy electrode striking. Useful especially for "difficult-to-start" electrodes
- ANTI-STICKING.**No electrode sticking.
- ARC FORCE** adjustable. Enables to control the welding penetration and improve the arc stability.
- TIG WELDING**
- TIG.** By using the proper TIG welding Kit and pure argon gas, the machine is able to weld thin metal sheets of many type of materials as: mild steel, stainless steel, copper, nickel etc.
- TIG LIFT.** Optimise the arc stroke, improving the life of the electrode avoiding tungsten inclusions in the weld puddle.
- Thermostatical protection**
- * **Overvoltage, motogenerator +/- 30%**
- Primary cable with Schuko plug 2,0m
- Instruction manual.
- Comes complete with:**
- Cables with earth clamp and electrode holder. Protective mask. Brush/hammer.
- plastic carry-case.

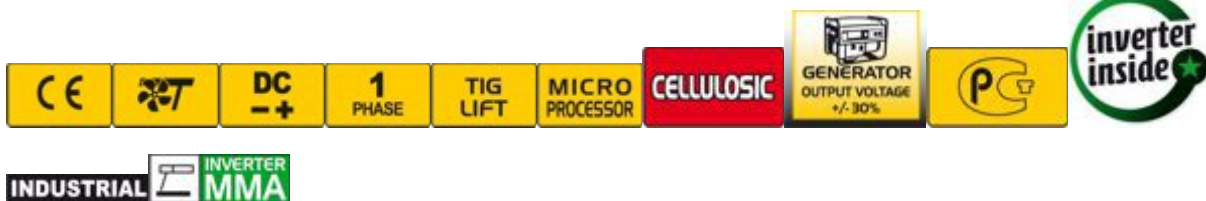

Included accessories

- [STICK / ARC WELDER ACCESSORY KIT 200 Amp Max - DS/16](#)
- [PLASTIC CASE](#)

Optional accessories

- [STICK / ARC WELDER ACCESSORY KIT 200 Amp Max - DS/20](#)
- [TIG WELDING ACCESSORY KIT - TG9](#)
- [TIG TORCH - 110A 4.0m with gas valve](#)
- [CABLE 2.0m 10mmq - WITH EARTH CLAMP 200A.](#)

Features

Alimentation (volt 50/60 Hz):	1 Ph x 230
Fuse (Amp):	25
Installation Power (Kw):	5,7
Open circuit voltage (Volt):	80
Welding current range:	TIG: (5 - 200) -- MMA: (30 - 180)
Usable electrodes (Ø mm):	TIG: (1 - 3,2) -- MMA: (1,6 - 5)
Duty Cycle (Amp) (%):	TIG: (200 @ 40%) - (165 @ 60%) -- MMA: (180 @ 40%) - (145 @ 60%)
Dimensions (mm):	400 x 160 x 260

Logistic data

Comodity Code	85153913
Weight (Kg)	11,1